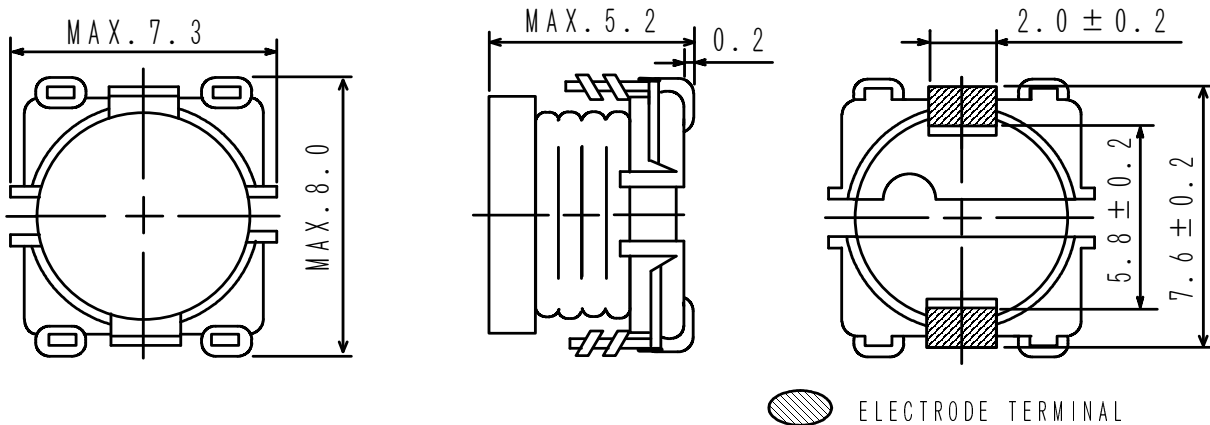
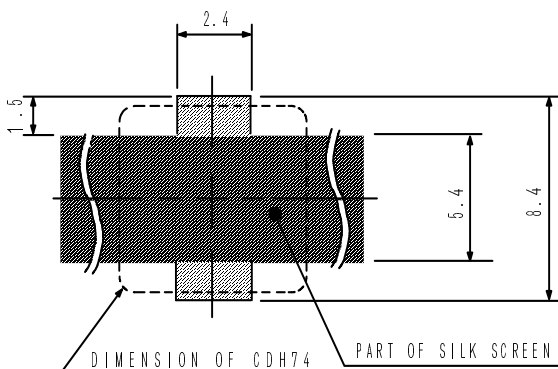


Type: CDH74
◆ Product Description

- 7.3×8.0mm Max.(L×W), 5.2mm Max. Height.
- Inductance range: 10~470 μ H.
- Rated current range: 0.33~2.75A.
- In addition to the standard versions of inductors shown here, custom inductors are available to meet your exact requirements.


◆ Feature

- Magnetically unshielded construction.
- Ideally used in Notebook PC, Projector, LCD TV, Game machine, STB etc as DC-DC Converter inductors.
- RoHS Compliance.

◆ Dimensions (mm)

◆ Land Pattern (mm)


Type: CDH74
◆ Specification

| Part Name ※ | Stamp | Inductance (μ H) 1 kHz | D.C.R.(Ω) Max.(Typ.) (at 20°C) | Rated current (A) ※1 |
|----------------|-------|-----------------------------------|---|-------------------------|
| CDH74NP-100L□ | 100 | 10 \pm 15% | 56m (43m) | 2.75 |
| CDH74NP-120L□ | 120 | 12 \pm 15% | 65m (50m) | 2.45 |
| CDH74NP-150L□ | 150 | 15 \pm 15% | 83m (64m) | 2.10 |
| CDH74NP-180L□ | 180 | 18 \pm 15% | 94m (72m) | 1.95 |
| CDH74NP-220L□ | 220 | 22 \pm 15% | 0.13(0.10) | 1.70 |
| CDH74NP-270K□ | 270 | 27 \pm 10% | 0.16(0.12) | 1.55 |
| CDH74NP-330K□ | 330 | 33 \pm 10% | 0.17(0.13) | 1.45 |
| CDH74NP-390K□ | 390 | 39 \pm 10% | 0.21(0.16) | 1.30 |
| CDH74NP-470K□ | 470 | 47 \pm 10% | 0.23(0.18) | 1.20 |
| CDH74NP-560K□ | 560 | 56 \pm 10% | 0.26(0.20) | 1.15 |
| CDH74NP-680K□ | 680 | 68 \pm 10% | 0.35(0.27) | 1.00 |
| CDH74NP-820J□ | 820 | 82 \pm 5% | 0.48(0.37) | 0.92 |
| CDH74NP-101J□ | 101 | 100 \pm 5% | 0.55(0.42) | 0.81 |
| CDH74NP-121J□ | 121 | 120 \pm 5% | 0.62(0.48) | 0.73 |
| CDH74NP-151J□ | 151 | 150 \pm 5% | 0.72(0.55) | 0.71 |
| CDH74NP-181J□ | 181 | 180 \pm 5% | 0.82(0.63) | 0.66 |
| CDH74NP-221J□ | 221 | 220 \pm 5% | 1.08(0.83) | 0.55 |
| CDH74NP-271J□ | 271 | 270 \pm 5% | 1.38(1.10) | 0.48 |
| CDH74NP-331J□ | 331 | 330 \pm 5% | 1.55(1.24) | 0.40 |
| CDH74NP-391J□ | 391 | 390 \pm 5% | 2.09(1.67) | 0.38 |
| CDH74NP-471J□ | 471 | 470 \pm 5% | 2.39(1.91) | 0.33 |

※ Description of part name

CDH74NP-100L□

- B Box
- C Carrier Tape

※1. Rated current: The DC current at which the inductance decreases to 90% of it's initial value or when $\Delta t=40^{\circ}\text{C}$, whichever is lower($T_a=20^{\circ}\text{C}$).