





## RP-11 Single Contact Bayonet Base

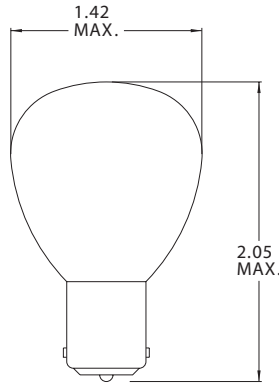

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM1183	5.5	6.25	50.0	100	C-2V
CM1105	6.2	5.72	50.0	125	C-2V
CM1133	6.2	3.91	32.0	200	C-2R
CM1143	12.5	1.98	32.0	400	C-2R
CM1195	12.5	3.00	50.0	300	C-2V
CM1293	12.5	3.00	50.0	300	C-2R
CM1139	12.8	1.04	15.0	700	C-6
CM1041	22.0	1.50	50.0	100	C-2V
CM1145	22.0	.96	27.0	100	C-2V
CM1047	26.0	2.70	105.0	25	2CC-6

## RP-11 Double Contact Bayonet Base

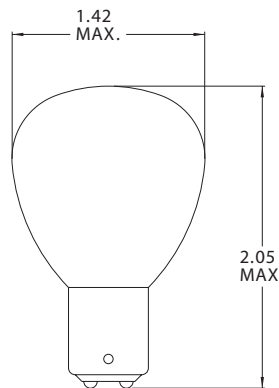

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM1184	5.5	6.25	50.0	100	C-2V
CM1000	6.2	3.90	32.0	125	C-2V
CM1134	6.2	3.98	32.0	125	C-2V*
CM1134	6.2	3.91	32.0	200	C-2R
CM1096	12.5	3.00	50.0	300	C-2V
CM1124	12.5	1.92	32.0	300	2C-2R*
CM1124	12.5	1.92	32.0	300	2C-2R*
CM1144	12.5	1.98	32.0	400	C-2R
CM1054	32.0	.74	32.0	100	C-2V
CM1056	32.0	1.15	50.0	100	C-7A
CM1230	32.0	.55	21.0	100	C-2V
CM1062	40.0	.92	50.0	100	C-5
CM1150	44.0	.47	21.0	150	C-13

\* Dual Filament Lamp

147 Central Avenue  
Hackensack, NJ 07601  
Phone: (201) 489-8989  
Fax: (201) 489-6911

18703 Dix Toledo Road  
Brownstown, MI 48193

Saret Zone Franca, Edificio B  
Alajuela Costa Rica

E-mail: sales@chml.com • Web Site: www.chml.com