

QUICKSWITCH® PRODUCTS HIGH-SPEED CMOS DUAL BUS SWITCH WITH INDIVIDUAL ACTIVE LOW ENABLES

IDTQS3306A

FEATURES:

- Enhanced N channel FET with no inherent diode to Vcc
- Very low ON resistance (5Ω typical)
- · Zero propagation delay, zero added ground bounce
- · Fast turn-on/turn-off time
- · Undershoot clamp diodes on all switch and control inputs
- · Available in SOIC package

APPLICATIONS:


- · Line control
- · Hot-swapping, hot-docking
- Voltage translation (5V to 3.3V)
- Power conservation
- · Capacitance reduction and isolation
- Clock gating
- · Bus isolation
- · Signal suppression/blanking

DESCRIPTION:

The QS3306A provides a set of two high-speed low resistance (3Ω typical) CMOS switches connecting inputs to outputs without propagation delay and without generating additional ground bounce noise. Individual enables (\overline{OE}) are used to turn on the switches. The QS3306A is ideal for signal and control switching since the device adds no noise, ground bounce, propagation delay, or significant power consumption to the system. The QS3306A can also be used for analog switching applications such as video.


The QS3306A is characterized for operation at -40°C to +85°C.

FUNCTIONAL BLOCK DIAGRAM

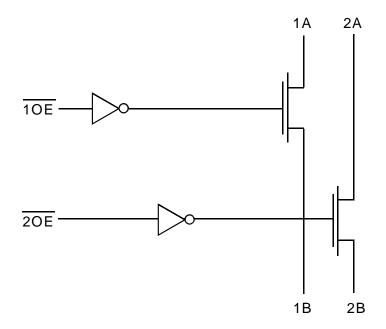

The IDT logo is a registered trademark of Integrated Device Technology, Inc.

PIN CONFIGURATION



SOIC (S1) TOP VIEW

ABSOLUTE MAXIMUM RATINGS(1)

Symbol	Description	Max	Unit
VTERM ⁽²⁾	Supply Voltage to Ground	-0.5 to +7	V
VTERM ⁽³⁾	DC Switch Voltage Vs	-0.5 to +7	V
VTERM ⁽³⁾	DC Input Voltage VIN	-0.5 to +7	V
VAC	AC Input Voltage (pulse width ≤20ns)	-3	V
Іоит	DC Output Current	120	mA
Рмах	Maximum Power Dissipation	0.5	W
Tstg	Storage Temperature	-65 to +150	°C

NOTES:

- 1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
- 2. Vcc terminals.
- 3. All terminals except Vcc .

CAPACITANCE (TA = +25°C, f = 1MHz, Vin = 0V, Vout = 0V)

Pins	Тур.	Max. ⁽¹⁾	Unit
OE (Inputs)	3	5	pF
Quickswitch Channels (Switch OFF)	5	7	pF

NOTE:

1. This parameter is guaranteed but not production tested.

PIN DESCRIPTION

Pin Names	I/O	Description	
1A - 2A	I/O	Bus A	
1B - 2B	I/O	Bus B	
10E - 20E	I	Switch Enable	

FUNCTION TABLE(1)

хŌЕ	хА	хВ	Function	
L	Н	Н	Connect	
L	L	L	Connect	
Н	Х	Χ	Disconnect	

NOTE:

1. H = HIGH Voltage Level

L = LOW Voltage Level

X = Don't Care

HIGH-SPEED CMOS DUAL BUS SWITCH WITH INDIVIDUAL ENABLES

DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:


Industrial: TA = -40°C to +85°C, VCC = $5V \pm 5\%$

Symbol	Parameter	Test Conditions	Min.	Typ. ⁽¹⁾	Max.	Unit
VIH	Input HIGH Voltage	Guaranteed Logic HIGH for Control Pins	2	_	_	V
VIL	Input LOW Voltage	Guaranteed Logic LOW for Control Pins	_	_	0.8	V
lin	Input Leakage Current (Control Inputs)	0V ≤ VIN ≤ VCC	_	_	±1	μΑ
loz	Off-State Current (Hi-Z)	0V ≤ Vouт ≤ Vcc, Switches OFF	_	_	±1	μA
Ron	Switch ON Resistance ⁽²⁾	Vcc = Min., VIN = 0V, ION = 30mA	_	5	7	Ω
		VCC = Min., VIN = 2.4V, ION = 15mA	_	10	15	
VP	Pass Voltage ⁽³⁾	$VIN = VCC = 5V$, $IOUT = -5\mu A$	3.7	4	4.2	V

NOTES:

- 1. Typical values are at Vcc = 5V and TA = 25°C.
- 2. Ron is guaranteed but not production tested.
- 3. Pass voltage is guaranteed but not production tested.

TYPICAL ON RESISTANCE vs Vin AT Vcc = 5V

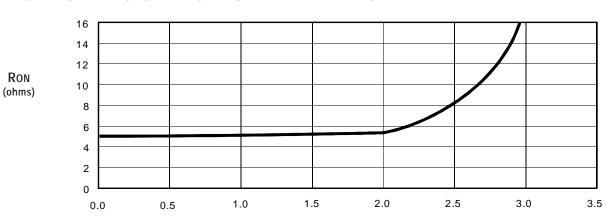

VIN (Volts)

HIGH-SPEED CMOS DUAL BUS SWITCH WITH INDIVIDUAL ENABLES

POWER SUPPLY CHARACTERISTICS

Symbol	Parameter	Test Conditions ⁽¹⁾	Max.	Unit
Icco	Quiescent Power Supply Current	Vcc = Max., Vin = GND or Vcc, f = 0	3	μA
Δlcc	Power Supply Current per Input HIGH(2)	Vcc = Max., Vin = 3.4V, f = 0	1	mA
ICCD	Dynamic Power Supply Current per MHz (3)	Vcc = Max., A and B Pins Open, Control Inputs Toggling @ 50% Duty Cycle	0.25	mA/MHz

NOTES:

- 1. For conditions shown as Min. or Max., use the appropriate values specified under DC Electrical Characteristics.
- 2. Per TTL-driven input (V_{IN} = 3.4V, control inputs only). A and B pins do not contribute to Δlcc.
- 3. This current applies to the control inputs only and represents the current required to switch internal capacitance at the specified frequency. The A and B inputs generate no significant AC or DC currents as they transition. This parameter is guaranteed but not production tested.

SWITCHING CHARACTERISTICS OVER OPERATING RANGE

 $T_A = -40^{\circ}C \text{ to } +85^{\circ}C, V_{CC} = 5V \pm 5\%$


CLOAD = 50pF, RLOAD = 500Ω unless otherwise noted.

Symbol	Parameter	Min. ⁽¹⁾	Тур.	Max.	Unit
t PLH	Data Propagation Delay ⁽²⁾	_	_	0.25 ⁽³⁾	ns
tphl	xA to xB				
tpzl	Switch Turn-On Delay	1.5	_	6.5	ns
tpzh	OE to xA/xB				
tplz	Switch Turn-Off Delay ⁽²⁾	1.5	_	5.5	ns
tphz	OE to xA/xB				

NOTES:

- 1. Minimums are guaranteed but not production tested.
- 2. This parameter is guaranteed but not production tested.
- 3. The bus switch contributes no propagation delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.25ns at C_L = 50pF. Since this time constant is much smaller than the rise and fall times of typical driving signals, it adds very little propagation delay to the system. Propagation delay of the bus switch, when used in a system, is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.

ORDERING INFORMATION

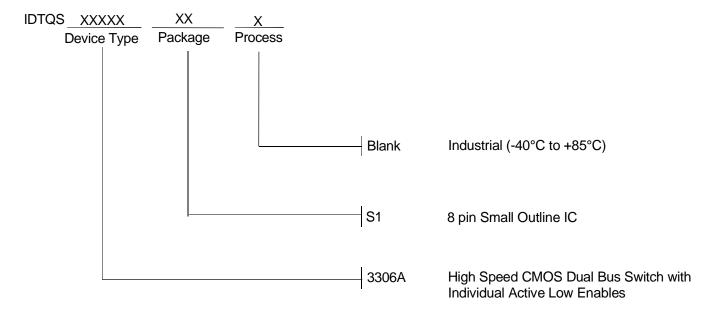



CORPORATE HEADQUARTERS

2975 Stender Way Santa Clara, CA 95054 for SALES:

800-345-7015 or 408-727-6116 fax: 408-492-8674 www.idt.com

for Tech Support: logichelp@idt.com (408) 654-6459