


MP8 SERIES

SINGLE-PHASE SILICON BRIDGE





**CHENG-YI
ELECTRONIC**

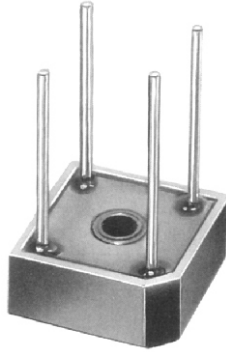

FEATURES

- Surge overload rating - 125 amperes peak
- Low forward voltage drop
- Small size: simple installation
- Silver Plated Copper Leads
- Mounting Position: Any
- Case: Molded plastic with Heatsink internally mounted in the bridge encapsulation

REVERSE VOLTAGE -50 to 1000 Volts
FORWARD CURRENT -8.0 Amperes

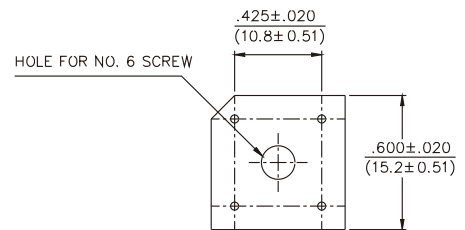

Polarity shown on side of case;
positive lead by beveled corner.

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
For capacitive load, derate current by 20%.

	MP8005	MP801	MP802	MP804	MP806	MP808	MP810	UNITS
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	35	70	140	280	420	560	700	V
Maximum Average Forward Rectified Output Current at				8.0				A
				3.0				
Peak Forward Surge Current 8.3 ms single half sine-wave super imposed on rated load				125				A
Maximum Forward Voltage Drop per Bridge Element at 3.0A Peak				1.1				V
Maximum Reverse Current at Rated DC Blocking Voltage per Element				10.0				μ A
				1.0				mA
Operating Temperature Range T _C				-55 to +125				°C
Storage Temperature Range T _A				-55 to +150				°C

NOTES: 1. Unit mounted on metal chassis
2. Unit mounted on P.C. Board

MP8 SERIES

SINGLE-PHASE SILICON BRIDGE



**CHENG-YI
ELECTRONIC**

RATING AND CHARACTERISTICS CURVES MP8 SERIES

FIG. 1 - MAXIMUM FORWARD SURGE CURRENT

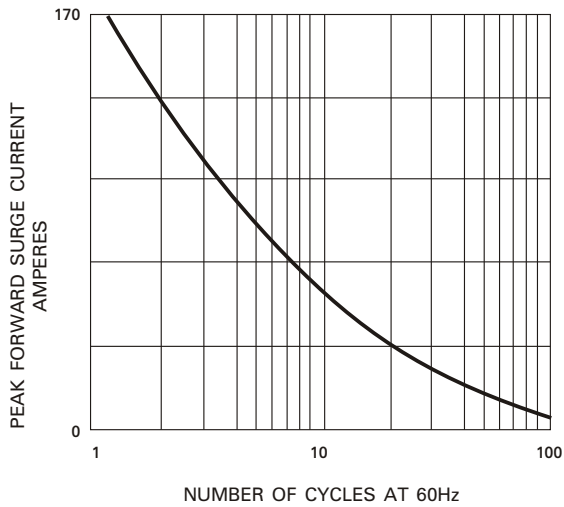


FIG. 2 - DERATING CURVE
OUTPUT RECTIFIED CURRENT

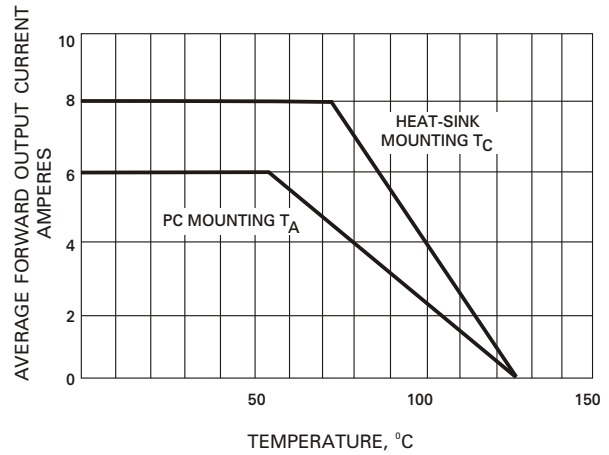


FIG. 3 - TYPICAL FORWARD
CHARACTERISTICS

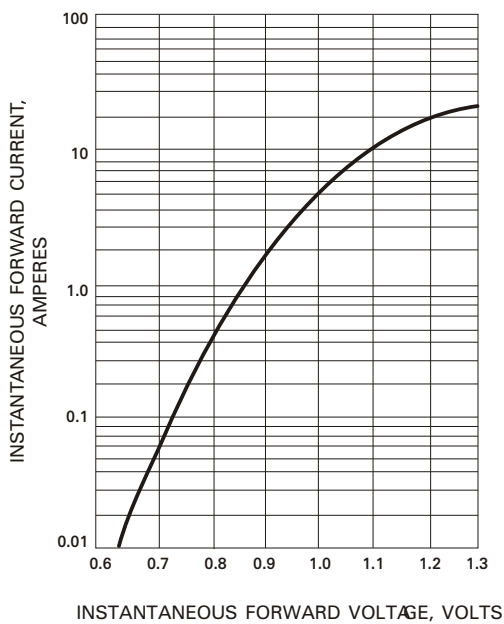


FIG. 4- TYPICAL REVERSE
CHARACTERISTICS

