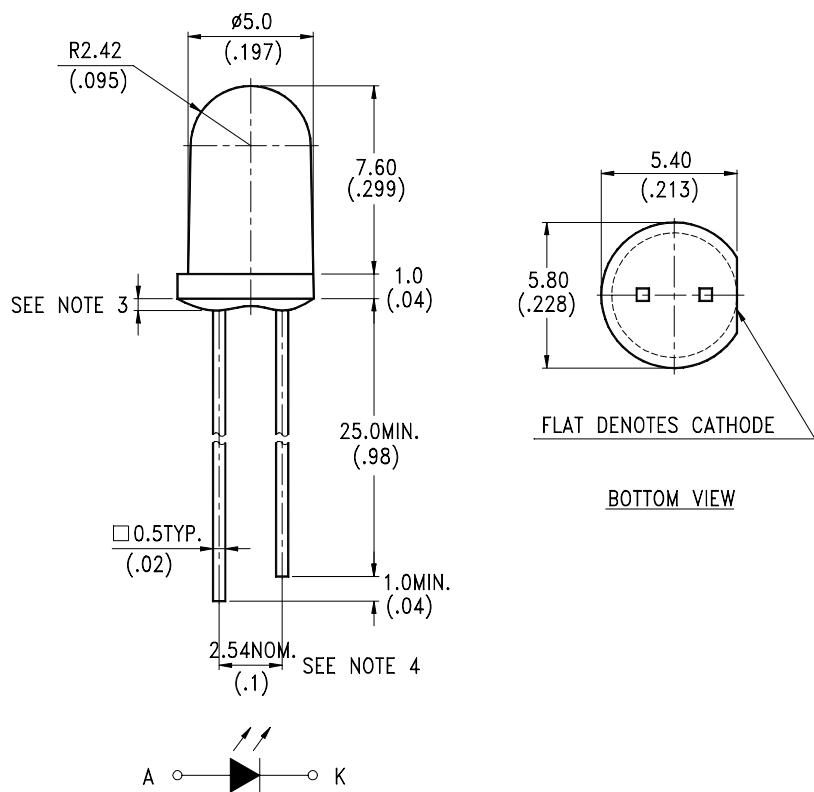


FEATURES

- * SPECIAL FOR HIGH CURRENT AND LOW FORWARD VOLTAGE
- * HIGH POWER
- * AVAILABLE FOR PULSE OPERATING
- * WIDE VIEWING ANGLE
- * LIGHT BLUE TRANSPARENT COLOR PACKAGE
- * TIN DIPPING LEADS

PACKAGE DIMENSIONS**NOTES:**

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}(.010")$ unless otherwise noted.
3. Protruded resin under flange is 1.5mm(.059") max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.



LITE-ON ELECTRONICS, INC.

Property of Lite-On Only

ABSOLUTE MAXIMUM RATINGS AT TA=25°C

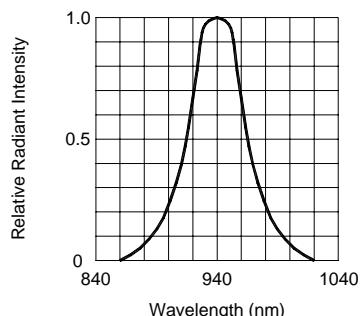
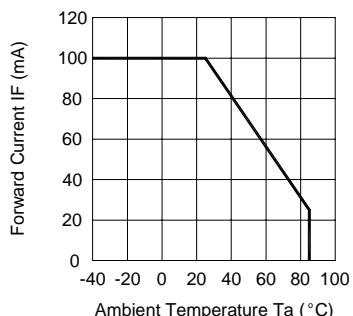
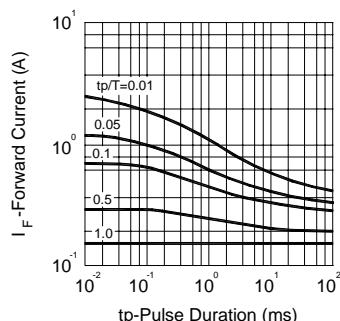
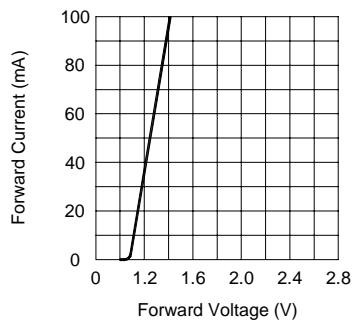
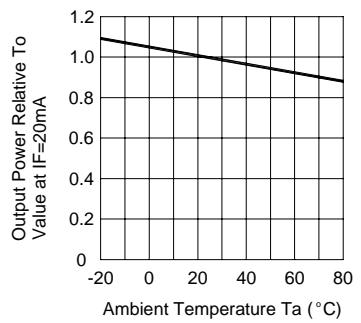
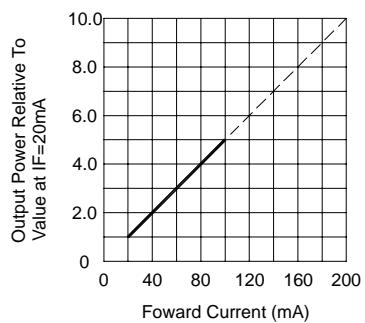
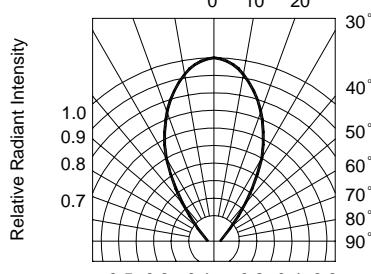
PARAMETER	MAXIMUM RATING	UNIT
Power Dissipation	150	mW
Peak Forward Current (300pps, 10 μ s pulse)	2	A
Continuous Forward Current	100	mA
Reverse Voltage	5	V
Operating Temperature Range	-40°C to + 85°C	
Storage Temperature Range	-55°C to + 100°C	
Lead Soldering Temperature [1.6mm(.063") From Body]	260°C for 5 Seconds	

ELECTRICAL OPTICAL CHARACTERISTICS AT TA=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	Remark
Radiant Intensity	I _E	35	50		mW/sr	I _F = 100mA	
Peak Emission Wavelength	λ_p		940		nm	I _F = 100mA	
Spectral Line Half-Width	$\Delta \lambda$		50		nm	I _F = 100mA	
Forward Voltage	V _F		1.4	1.8	V	I _F = 100mA	
Reverse Current	I _R			100	μ A	V _R = 5V	
Viewing Angle (See FIG.6)	2 $\theta_{1/2}$		60		deg.		

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTICS CURVES

(25°C Ambient Temperature Unless Otherwise Noted)


FIG.1 SPECTRAL DISTRIBUTION

FIG.2 FORWARD CURRENT VS. AMBIENT TEMPERATURE

FIG.7 PULSE FORWARD CURRENT VS. PULSE DURATION

FIG.3 FORWARD CURRENT VS. FORWARD VOLTAGE

FIG.4 RELATIVE RADIANT INTENSITY VS. AMBIENT TEMPERATURE

FIG.5 RELATIVE RADIANT INTENSITY VS. FORWARD CURRENT

FIG.6 RADIATION DIAGRAM