

CLR130W, CLR131W, CLR132W


NPN Silicon Photodarlington

CLR130W, CLR131W, and CLR132W are exact replacements for obsolete part numbers CLR2049, CLR2050 and CLR2060.



Clairex
Technologies, Inc.

April, 2002

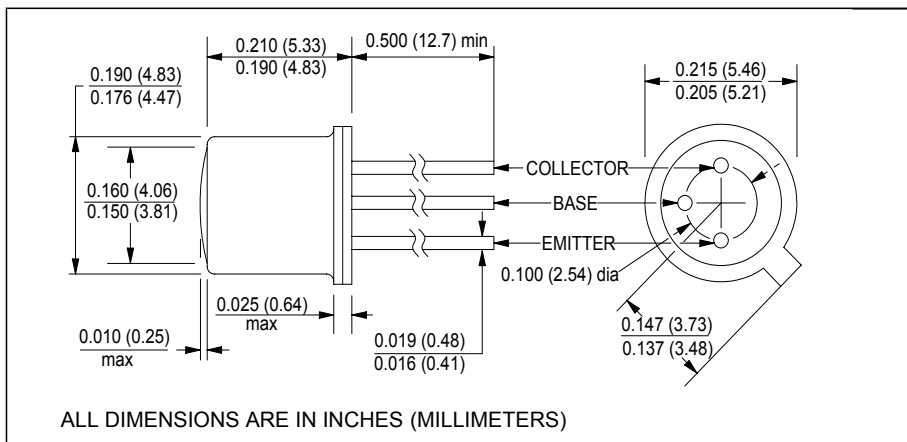

features

- high sensitivity
- 70° acceptance angle
- TO-18 hermetically sealed package
- transistor base is bonded

description

The CLR130W-CLR132W series are NPN silicon photodarlington mounted in TO-18 flat window packages. The wide acceptance angle provided by the flat window enables even reception over a relatively large area. Photodarlington allow high sensitivity at low irradiance levels. These devices are mechanically and spectrally matched to the CLE130-CLE133 series IREDs. For additional information, call Clairex.

absolute maximum ratings (T_A = 25°C unless otherwise stated)

storage temperature	-65°C to +150°C
operating temperature	-65°C to +125°C
lead soldering temperature ⁽¹⁾	260°C
collector-emitter voltage	30V
continuous collector current	50mA
maximum continuous power dissipation ⁽²⁾	250mW

notes:

1. 0.06" (1.5mm) from the header for 5 seconds maximum
2. Derate linearly 2.0mW/°C from 25°C free air temperature to T_A = +125°C.

electrical characteristics (T_A = 25°C unless otherwise noted)

symbol	parameter	min	typ	max	units	test conditions	
I _L	Light current ⁽¹⁾	CLR130W	2.0	-	-	mA	V _{CE} =5V, E _e =0.6mW/cm ²
		CLR131W	6.0	-	-	mA	
		CLR132W	14.0	-	-	mA	
I _{CEO}	Collector dark current	-	-	100	nA	V _{CE} =10V, E _e =0	
V _{(BR)CEO}	Collector-emitter breakdown	30	-	-	V	I _C =100μA	
t _r	Output rise time	-	100	-	μs	V _{CC} =5V, R _L =100Ω.	
t _f	Output fall time	-	150	-	μs	V _{CC} =5V, R _L =100Ω.	
θ _{HP}	Total angle at half sensitivity points	-	70	-	deg.		

note: 1. Radiation source for all light current testing is a 940nm IRED.

Clairex reserves the right to make changes at any time to improve design and to provide the best possible product.

Revised 12/01/04

Clairex Technologies, Inc.
Phone: 972-265-4900

1301 East Plano Parkway
Fax: 972-265-4949

Plano, Texas 75074-8524
www.clairex.com