

High Frequency Ceramic Solutions

2450 MHz Band Pass Filter

P/N 2450BP15H0100

Detail Specification: 08/29/08

Page 1 of 2


General Specifications

Part Number	2450BP15H0100
Frequency (MHz)	2400 - 2500
Attenuation (min.)	25 dB @ 1200 - 1300 MHz
Attenuation (min.)	10 dB @ 2000 MHz
Attenuation (min.)	12 dB @ 3000 MHz
Attenuation (min.)	30 dB @ 3600 - 3800 MHz
Attenuation (min.)	34 dB @ 4800 - 5000 MHz
Insertion Loss	1.5 max. @ 25°C, 1.8 max. @ -40~85°C
Return Loss	9.5 dB min.

Impedance	50 Ω
Input Power	500 mW max.
Reel Quantity	4,000
Operating Temperature	-40 to +85°C
Storage Temp	+5 ~ +35°C, Humidity: 45~75%RH, 12 mos. Max


P/N	Packaging Style	Bulk	Suffix = S	Eg. 2450BP15H0100S
	Termination Style	T & R	Suffix = E	Eg. 2450BP15H0100E
Suffix	Packaging Style	100% Tin	Suffix = None	Eg. 2450BP15H0100(E or S)
	Termination Style	Tin / Lead	Suffix = /Pb	Eg. 2450BP15H0100(E or S)/Pb

Terminal Configuration	
No.	Function
1	GND
2	OUT
3	GND
4	IN



Mechanical Dimensions


	In	mm
L	0.079 ± 0.006	2.00 ± 0.15
W	0.049 ± 0.004	1.25 ± 0.10
T	0.037 ± 0.004	0.95 ± 0.10
a	0.051 ± 0.006	1.30 ± 0.15
b	0.012 ± 0.006	0.30 ± 0.15
c	0.010 ± 0.006	0.25 ± 0.15
d	0.014 ± 0.006	0.35 ± 0.15

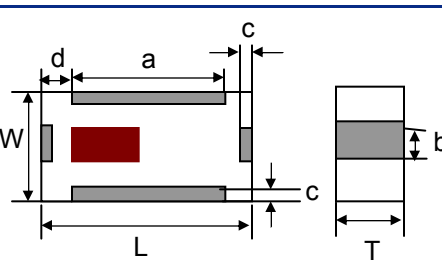

Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

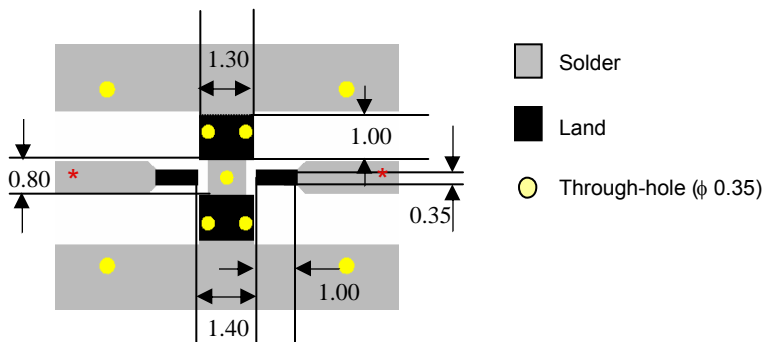

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2007 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


2450 MHz Band Pass Filter

P/N 2450BP15H0100

Detail Specification: 08/29/08

Page 2 of 2

Typical Electrical Performance (T=25°C)

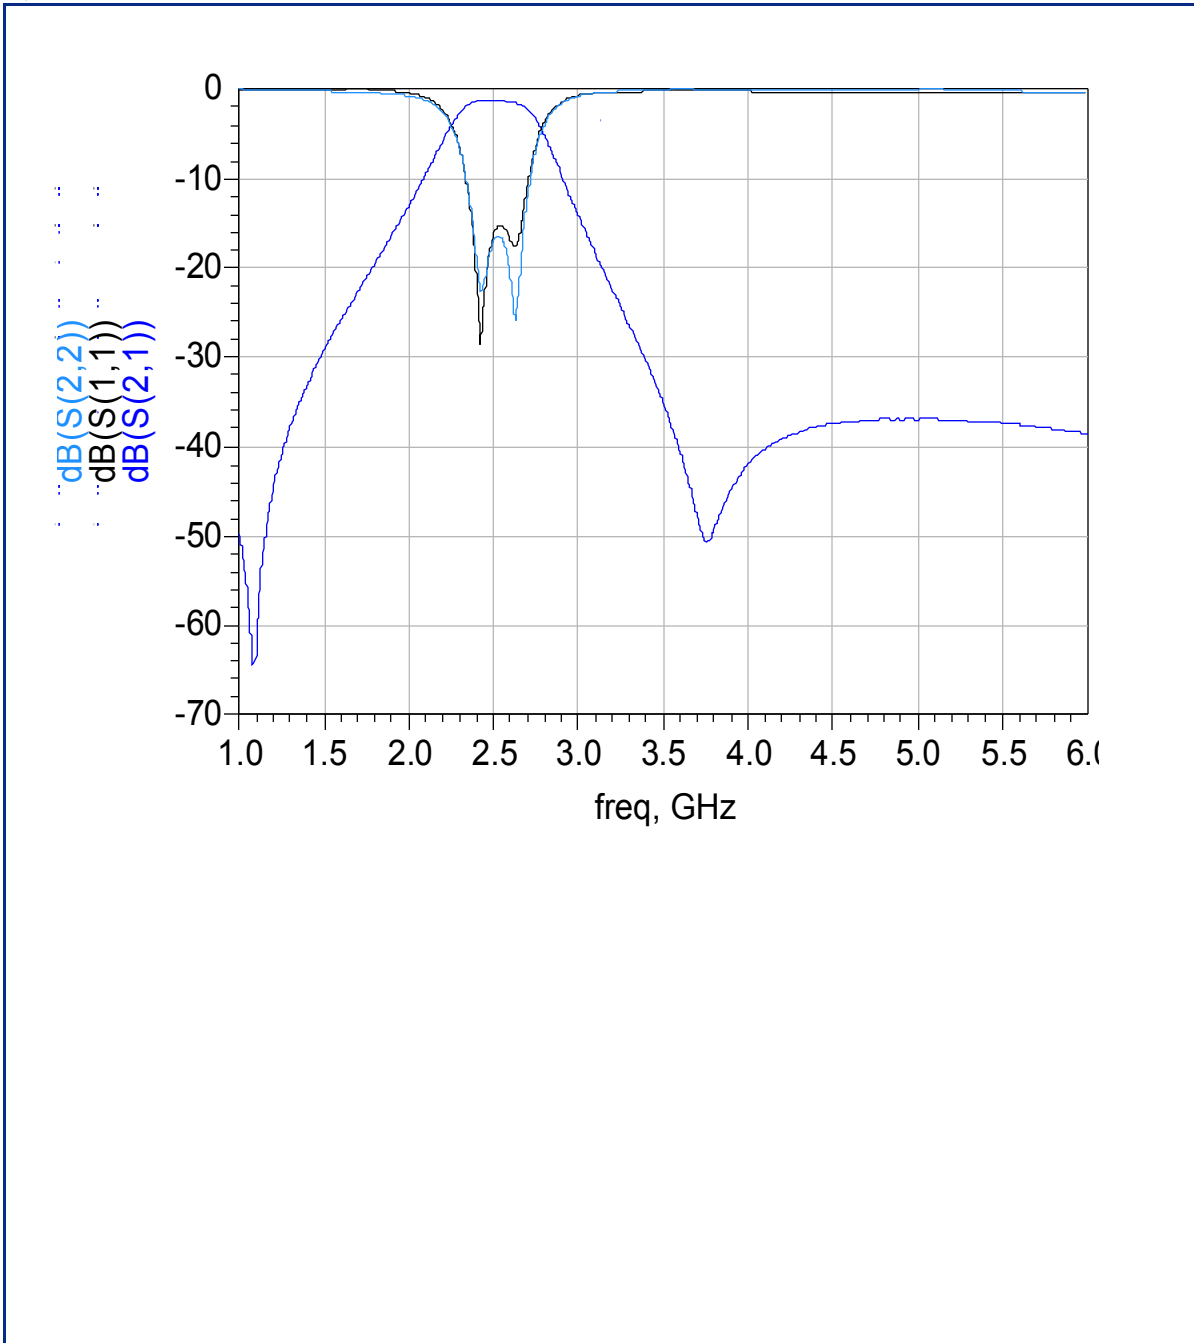

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2007 Johanson Technology, Inc. All Rights Reserved