




Shape

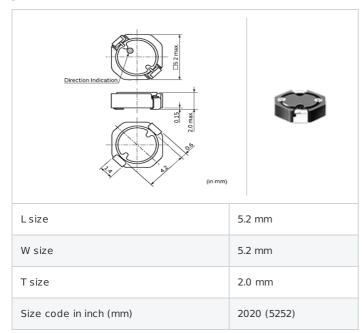

Notes

Rated current (Isat) is specified when the decrease of the initial inductance value at 30%. (The ambient reference temperature is 20°C) Rated current (Itemp) is specified when temperature of the

inductor is raised 40°C by DC current. (The ambient reference temperature is 20°C)

References

code	ım quantity
=P3 φ 330mm Embossed taping 2000	

Mass	(Тур.)
1 piece	0.138g


Specifications


Inductance	100µH ±20%
Inductance test frequency	0.1MHz
Rated current (Isat) (Based on Inductance change)	230mA
Rated current (Itemp) (Based on Temperature rise)	260mA
Max. of DC resistance	1.500Ω
Operating temperature range (Self-temperature rise is included)	-40~85°C
Class of magnetic shield	Ferrite Core

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. 2. This datasheet has only typical specifications because there is no space for detailed specifications.

Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

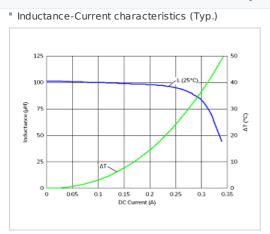

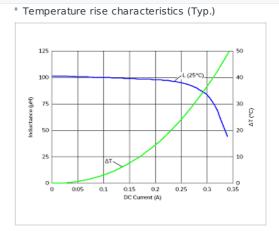

🔔 Attention

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering. 2 of 2